




Secure the upper bracket using the adjustment screws. Fix the bottom bracket <u>after</u> adjusting the frames.

The anchors are not supplied, the installer must use anchors suitable for the fixing wall.

Minimum scew diameter Ø5 mm.

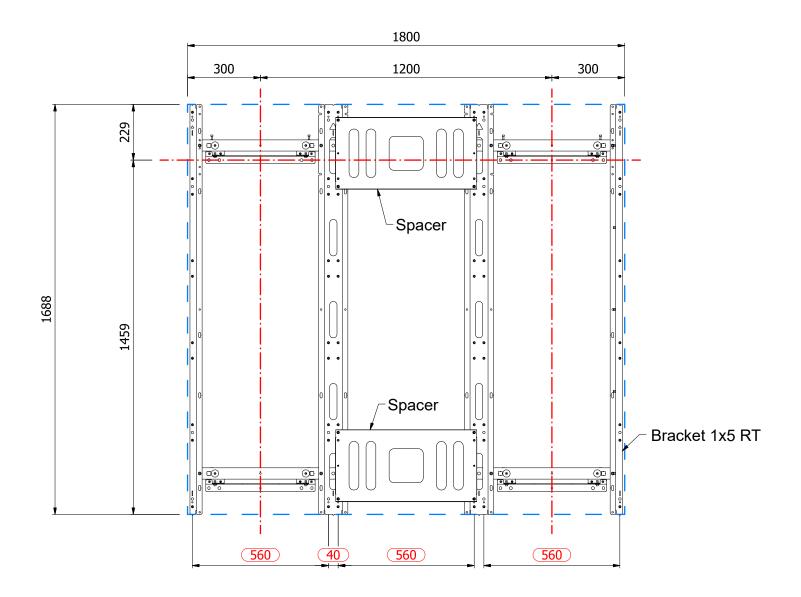

Attention

Correctly space the frames with the help of the two templates and repeat the same steps as on the previous page.

