
M Motorized TV Lift Duo X-Large Drop Down

7340234811366

Operating Instructions & Troubleshooting

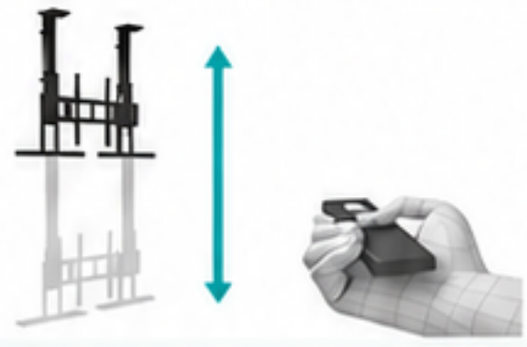

1 Height display

Press and hold S, then press DOWN. Release both buttons when the digits flash. Use UP or DOWN to set the displayed height. Press S to save.

2 Travel value

Press and hold S, then press UP. Release both buttons when the digits flash. Use UP or DOWN to adjust the travel value. Press S to save.

3 Units

Press and hold S for 8 seconds to switch automatically between metric and imperial units.

4 Upper & lower travel limits

- **Set upper limit:** Raise the desk to the desired height. Quickly press S repeatedly 7 times. SHI appears, confirming that the upper limit is set.
- **Clear upper limit:** Raise the desk to the upper limit. Quickly press S repeatedly 7 times. SHO appears, confirming that the upper limit is cleared.
- **Set lower limit:** Lower the desk to the desired height. Quickly press S repeatedly 7 times. SLL appears, confirming that the lower limit is set.
- **Clear lower limit:** Lower the desk to the lower limit. Quickly press S repeatedly 7 times. SLO appears, confirming that the lower limit is cleared.

5 Collision sensitivity

Press and hold S, then press the memory handset's LOCK button. Release S, but continue holding LOCK until L-2 appears.

Keep holding LOCK until the number flashes.

- Press 1 to disable internal-gyroscope collision detection.
- Press 2 for low sensitivity.
- Press 3 for medium sensitivity.
- Press 4 for high sensitivity.

Press S to save.

6 Memory buttons

Press S until RST appears. Before RST disappears, press the desired memory button (1, 2, 3 or 4) to store the current height.

7 Remote-control pairing

- **Pair:** Hold DOWN on the remote control. Press and hold UP on the controller to power it on. A beep confirms successful pairing.
- **Unpair:** Hold UP on the remote control. Press and hold DOWN on the controller to power it on. Three consecutive beeps confirm successful unpairing.

Troubleshooting

CODE	CAUSE	ACTION
RST	Initialization required	Press and hold DOWN until the height is displayed.
ER1	Motor connection error	Check the motor cable connections and the motor.
HOT	Thermal protection: continuous operation too long	Wait 18 minutes before operating again.

Important — pairing and testing

Pair each remote control with its controller individually. Do not power several controllers simultaneously during pairing or testing: each controller stores only one remote-control code.