
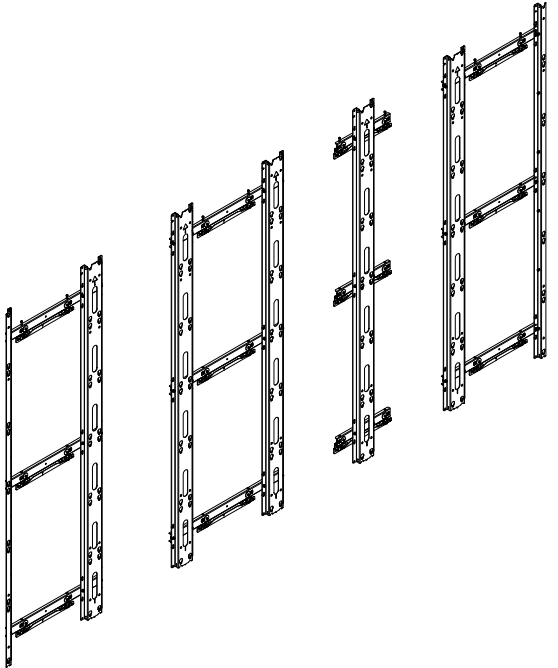
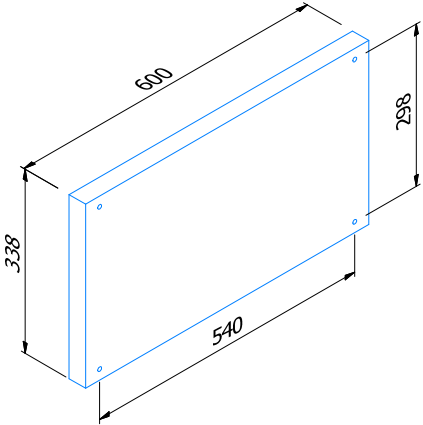
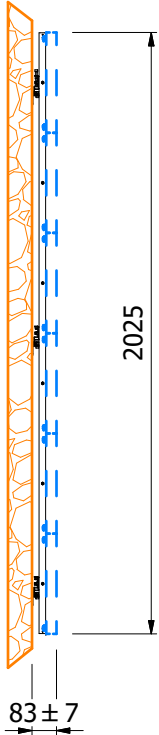
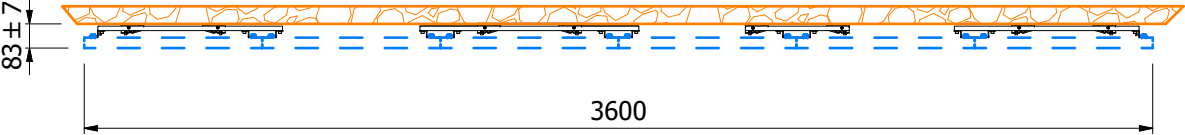



LEDWALL PHILIPS 51XX 6x6

PHILIPS 51XX

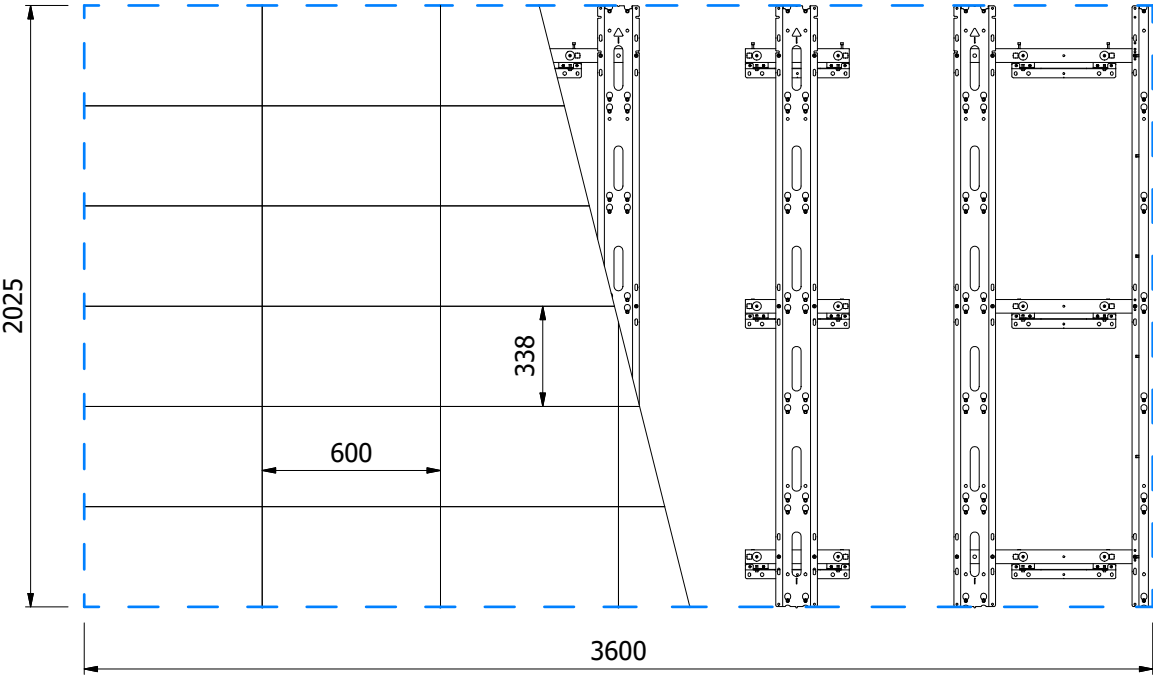


LEDWALL PHILIPS 51XX 6x6


BRACKET 1x6 LT
(x 1)

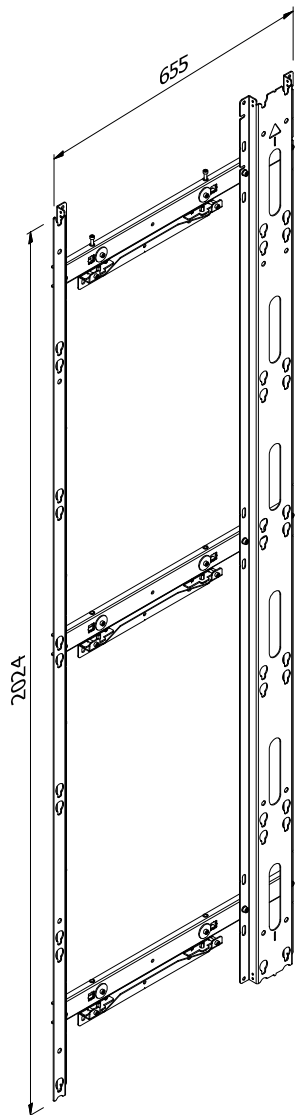


BRACKET 1x6 CT
(x 1)

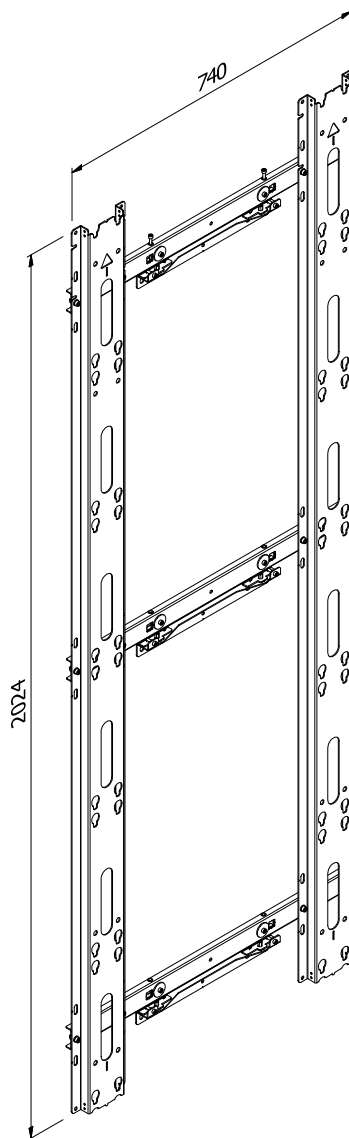


SINGLE BRACKET
1x6
(x 1)

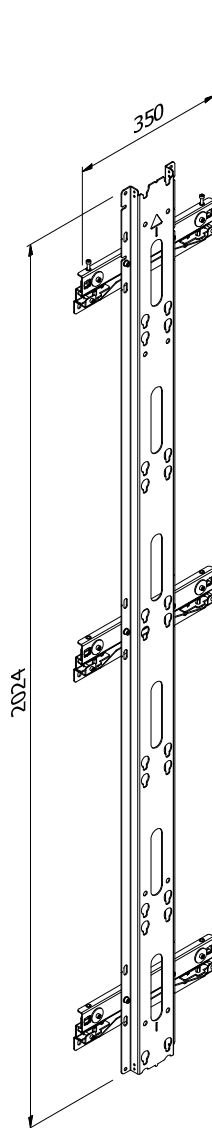

BRACKET 1x6 RT
(x 1)

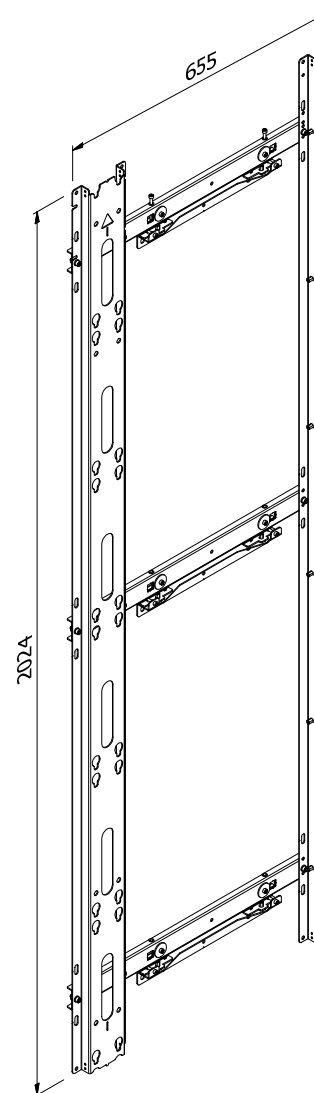


SPACER
(x 2)

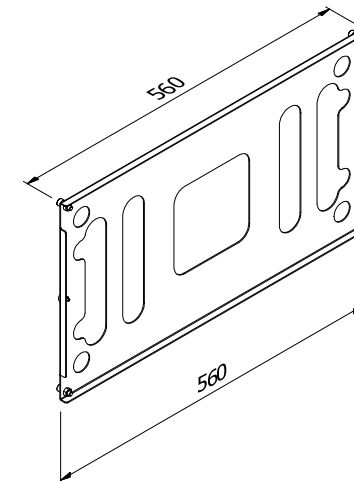

SCREW BAG


SELF-LOCKING NUT M8



GRUB-
SCREW
M8x20

PAWL
QTA' 144
(MADE BY 4 BAGS)

LEDWALL PHILIPS 51XX 6x6

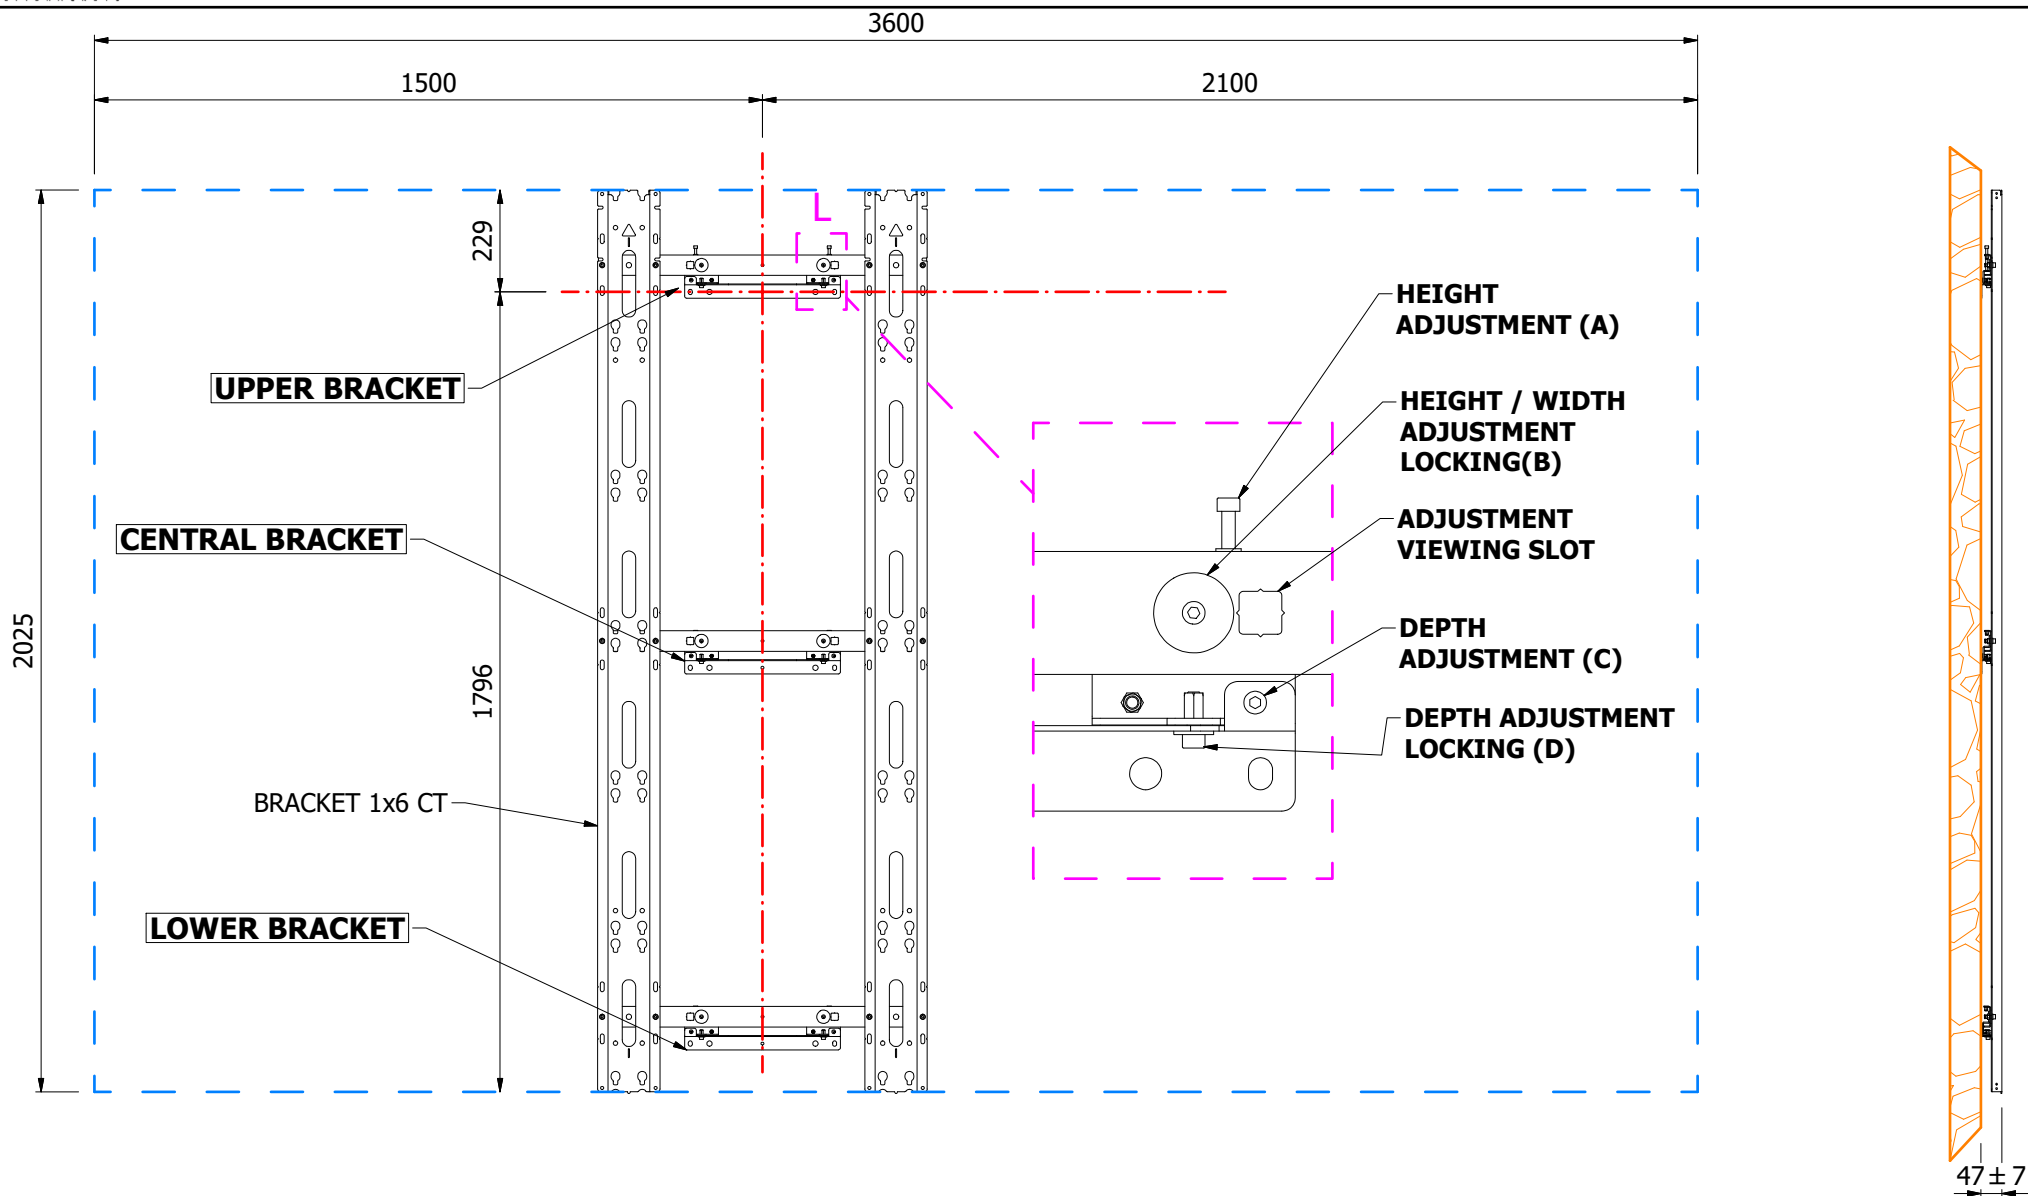


Secure the upper bracket using the adjustment screws

Fix the lower and central brackets AFTER adjusting the frames

The anchors are not supplied, the installer must use suitable anchors to the fixing wall. Minimum diameter of the screw $\varnothing$ 5 mm

LEDWALL PHILIPS 51XX 6x6

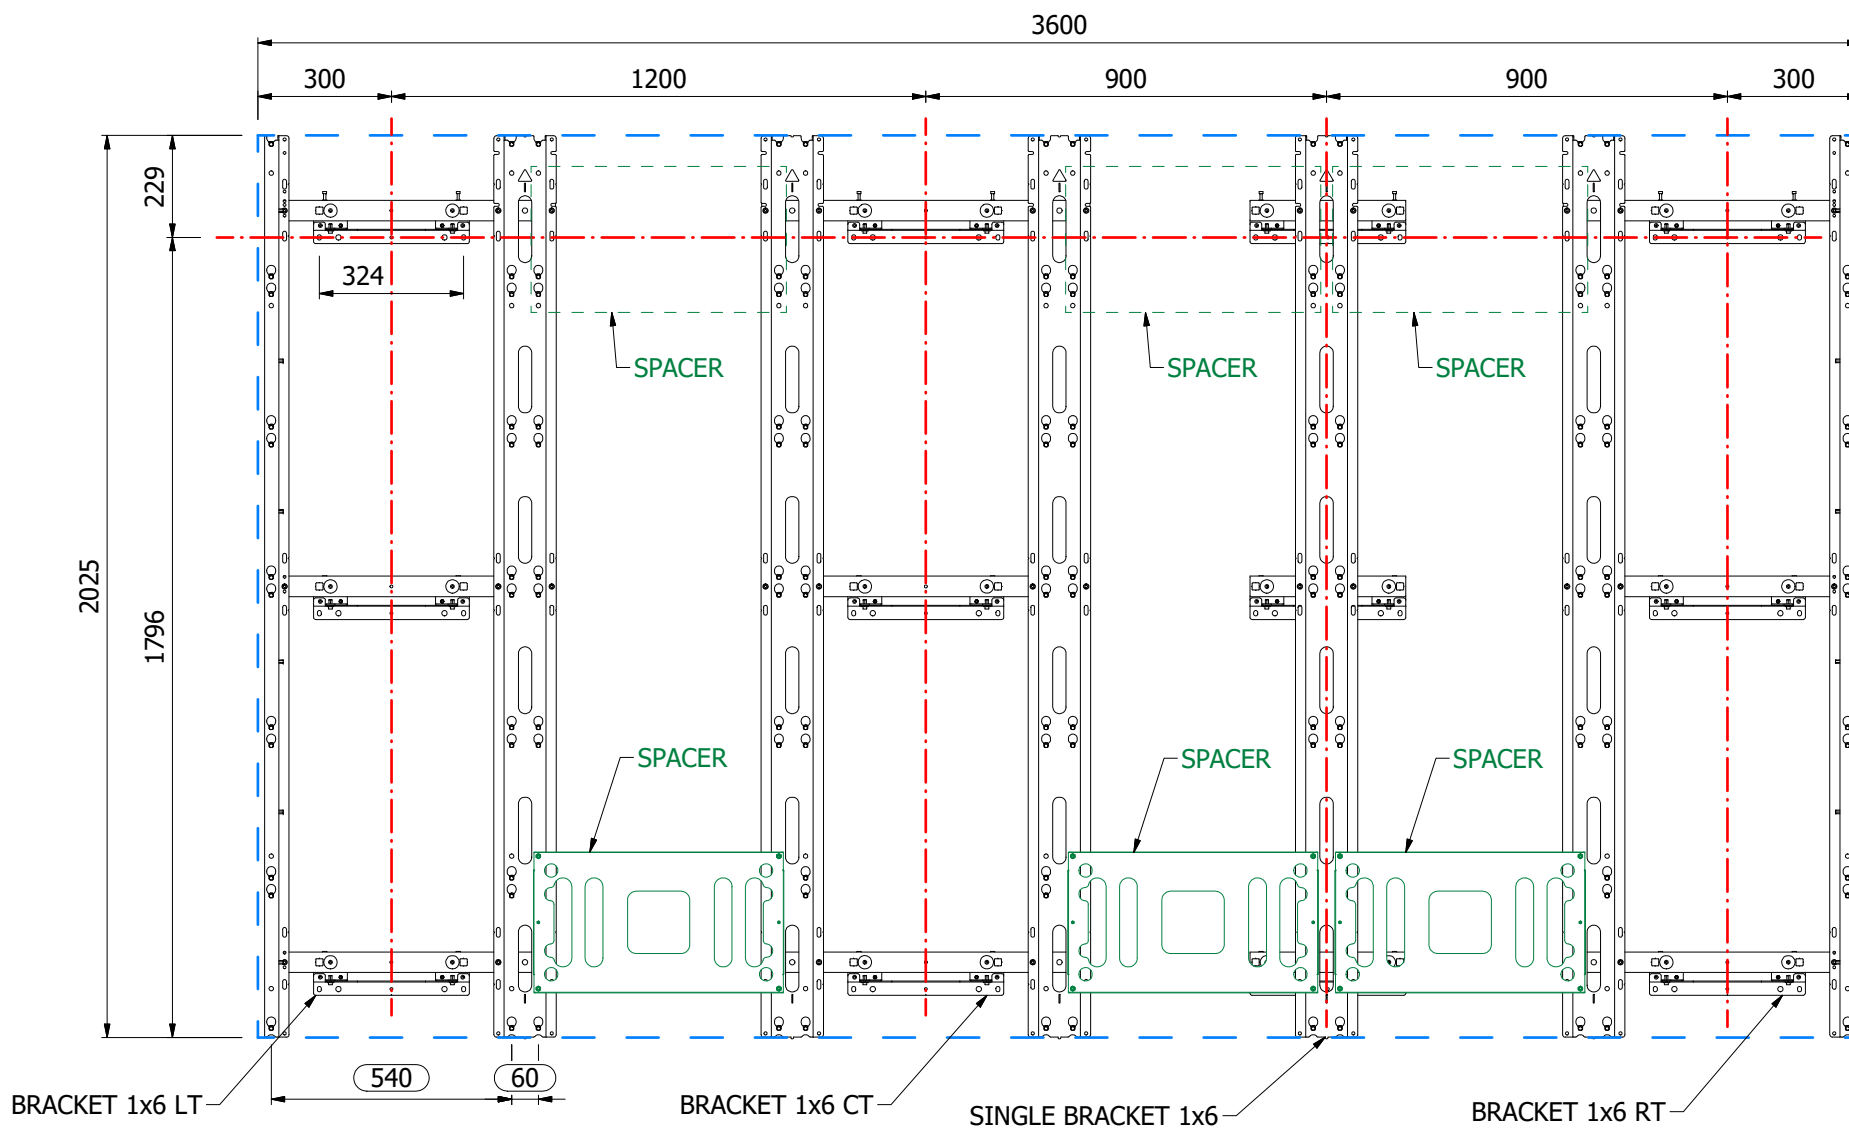

ATTENTION,
Space the frames correctly with the help of the 2 templates and repeat the same steps on the previous page.

LEDWALL PHILIPS 51XX 6x6

